

Rugged mobile receipt & label printer range

RJ Series mobile printers



RJ Series

Empower
workers to
create and
update labels
at any location



Brother provide a comprehensive range of RJ mobile printers.

They feature impressive print speeds and a rugged build quality to fit the requirements of a wide range of vertical market applications. Bluetooth, Wi-Fi & USB connectivity options make it possible for busy mobile workers to print on site or in the field.



RJ Series mobile printers



Rugged design, tested to last

Due to the nature of many mobile applications, printers may be exposed to a range of outdoor conditions which can affect the print operation or cause damage, e.g. a traffic warden printing in the field. However, all RJ printers are tested against IP54 protection standards, offering that extra peace of mind for such outdoor applications subject to damp / moisture or indoor environments where dust is present. In addition, the RJ range is drop tested up to 2.5 metres to provide extra credibility in terms of toughness and reliability.



RJ Series

Up to **2 inch**



RJ-2031



RJ-2131

Up to **3 inch**



RJ-3035B



RJ-3055WB



RJ-3235BL



RJ-3255WBL

Up to **4 inch**



RJ-4235BL



RJ-4255WBL

Trust RJ Series mobile printers to take on every application

Retail

Increase efficiency for retailers with lightweight, durable and easy to use mobile printers. This provides staff with a simple and accurate labelling and receipt solution, perfect for pricing, promotions and queue-busting to increase customer satisfaction.



RJ-2131

RJ-3255WBL

Applications include:

- Shelf edge labels
- 'Queue busting' receipt printing
- Mark down or discount labels
- Price labels
- Food traceability labelling
- Click and collect labels



Direct Store Deliveries

Delivery drivers need to be equipped with a seamless solution to help streamline their workflow and minimise downtime. Mobility and integration is key, so drivers have access to systems providing pricing, invoicing, inventory control, and customer information. This makes it easier to produce invoices on-site.



RJ-2031

RJ-3035B

RJ-4255WBL

Applications include:

- Sales orders and confirmations
- Returned goods receipts and labels
- Customer receipts
- Delivery receipts



Field Service

Whether you need receipts or smaller format labels, without a mobile print solution, handwritten documents are time consuming and prone to error. That's why most businesses are empowering their workforce with mobile technology, meaning they complete tasks on the move, professionally and on schedule.




RJ-3035B

RJ-3235BL

RJ-4255WBL

Applications include:

- Receipts and invoices
- Repair estimates
- Statements of work
- Work orders
- Estimates and quotations
- Maintenance and service reports

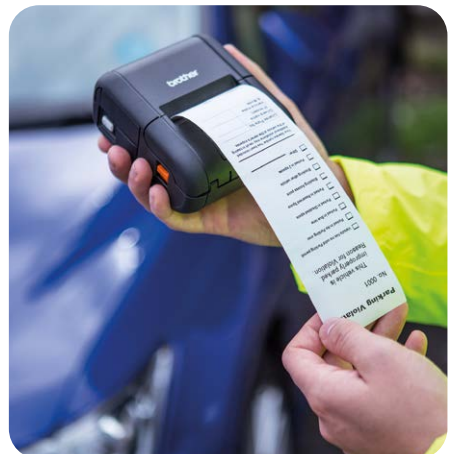

Public Safety

Increase operational efficiency by allowing law enforcement officers and emergency staff to document and report incidents more accurately and efficiently, at the point of interaction. With their durable design, fast print speed & reliable operation, the range offers a competitive combination of performance and features.

Warehousing

Efficient warehousing operations and worker productivity are critical to the success of many companies. Using wireless connectivity, the Brother RJ mobile printer range provides workers with the ability to print barcode labels on-demand, at the point of application. This saves time and reduces potential errors caused by mislabelling.



RJ-3035B

RJ-4255WBL



RJ-3035B

RJ-3255WBL

RJ-4255WBL

Applications include:

- Parking violations
- Recording of accidents and crime scenes
- Electronic citations and fines
- Warning Notices

Applications include:

- Work-in-progress labels
- Bin and shelf labels
- Shipping and despatch labels
- Inventory pick and return tickets



RJ Series



RJ series range brief summary

	RJ-2031	RJ-2131	RJ-3035B	RJ-3055WB
	2 Inch		3 Inch	
Printing				
Print technology	Direct thermal		Direct thermal	
Print speed	152mm/sec		101.6mm/sec	
Resolution	203dpi		203dpi	
Max print width	54mm		72mm	
Media Types				
Receipt	●	●	●	●
Labels		●		●
Connectivity				
USB	●	●	●	●
Wireless LAN				●
Bluetooth	●	●	●	●
AirPrint				
MFi	●	●	●	
General				
IP rating	IP54		IP42 (IP54 with optional case)	
Drop protection (metres)	2.5		1.8 (2.5 with optional case)	
Weight (with battery)	445g	535g	375g	375g
Dimensions (mm)	99.3(w) 57(h) 122.8(d)	99.3(w) 73(h) 151.7(d)	105(w) 49.5(h) 116(d)	105(w) 49.5(h) 116(d)
Operating system support	Windows 10, Windows 11, Linux		Windows 10, Windows 11 Windows server 2012, 2012 R2, 2016, 2019, 2022 Linux, Mac OS 13, 14, 15, 26	
Mobile OS	Android / iOS	Android / iOS	Android / iOS	
Supported commands	P-touch Template, ESC/P, Raster, ZPL 2 emulation, CPCL emulation		FBPL-EZC (EPL 2 / ZPL 2 / CPCL) FBPL-EZP (EPL 2 / ZPL 2/ ESC-POS) - downloadable	



RJ series range brief summary

RJ-3235BL	RJ-3255WBL	RJ-4235BL	RJ-4255WBL
3 Inch		4 Inch	

Printing

Print technology	Direct thermal		Direct thermal	
Print speed	127mm/sec		127mm/sec	
Resolution	203dpi		203dpi	
Max print width	72mm		104mm	

Media Types

Receipt	●	●	●	●
Labels	●	●	●	●

Connectivity

USB	●	●	●	●
Wireless LAN		●		●
Bluetooth	●	●	●	●
AirPrint		●		●
MFi	●	●	●	●

General

IP rating	IP54		IP54	
Drop protection (metres)	2.0		2.1	
Weight (with battery)	807g	807g	850g	850g
Dimensions (mm)	117(w) 77(h) 180(d)	117(w) 77(h) 180(d)	153(w) 68(h) 159(d)	153(w) 68(h) 159(d)
Operating system support	Windows 10, Windows 11 Windows Server 2012, 2012 R2, 2016, 2019, 2022, 2025 Linux		Windows 10, Windows 11, Linux RJ-4255WBL also supports: Windows Server 2012, 2012 R2, 2016, 2019, 2022, 2025	
Mobile OS	Android / iOS	Android / iOS	Android / iOS	Android / iOS
Supported commands	Raster, ESC/P, P-touch Template, ZPL 2 emulation, CPCL emulation		P-touch Template, ESC/P, Raster, ZPL 2 emulation, CPCL emulation, EPL 2, DPL	



Customise your
RJ printer with
a great range
of accessories



Accessories and print supplies

Brother has designed and engineered a wide range of accessories to help customise the solution, whatever your requirement. Brother accessories help workers to equip their device in-vehicle and on-body. Power options also help with increased battery demands.

Power Options

PA-BT-003

Li-ion rechargeable
Battery

For models:

RJ-2031 | RJ-2131



PA-BT-006

Rechargeable Li-ion
smart Battery

For models:

RJ-3235BL | RJ-3255WBL
RJ-4235BL | RJ-4255WBL



PA-BT-009

Li-ion rechargeable
battery (Standard)

For models:

RJ-3035B | RJ-3055WB



PA-AD-600A

AC Adapter

For models:

RJ-2031 | RJ-2131
RJ-3235BL | RJ-3255WBL
RJ-4235BL | RJ-4255WBL



PA-CD-600CG

Car Adaptor
(cigarette)

For models:

RJ-2031 | RJ-2131
RJ-3235BL | RJ-3255WBL
RJ-4235BL | RJ-4255WBL



PA-CD-600WR

Car Adapter
(wired)

For models:

RJ-2031 | RJ-2131
RJ-3235BL | RJ-3255WBL
RJ-4235BL | RJ-4255WBL



Accessories

PA-BC-002

Battery Charging Unit (single)

For models:

RJ-2031 | RJ-2131



PA-BC-003

Battery Charging Unit (single)

For models:

RJ-3235BL | RJ-3255WBL
RJ-4235BL | RJ-4255WBL



PA-CR-005**

1-slot charging cradle with Ethernet

For models:

RJ-3235BL | RJ-3255WBL



PA-CR-002A**

Car Mount/ Charging Cradle

For models:

RJ-4235BL
RJ-4255WBL



PA-SS-4000

Shoulder Strap

For models:

RJ-2031 | RJ-2131
RJ-3235BL | RJ-3255WBL
RJ-4235BL | RJ-4255WBL



PA-CC-003

IP54 protective case with shoulder strap

For models:

RJ-3035B | RJ-3055WB



PA-BC-005

1-slot battery charger

For models:

RJ-3035B | RJ-3055WB



PA-4BC-002

4-slot battery charger

For models:

RJ-3035B | RJ-3055WB



PA-4CR-002

4-slot docking cradle

For models:

RJ-3035B | RJ-3055WB



PA-4CR-003**

4-slot charging cradle with Ethernet

For models:

RJ-3235BL
RJ-3255WBL



PA-CR-004

1-slot docking cradle

For models:

RJ-3035B | RJ-3055WB



PA-LPR-001

Linerless Platen Roller

For models:

RJ-4235BL
RJ-4255WBL



PA-LPR-003*

Linerless platen roller

For models:

RJ-3035B | RJ-3055WB



PA-LPR-004

Linerless platen roller

For models:

RJ-3235BL | RJ-3255WBL



PA-LP-007

Peeler

For models:

RJ-3235BL | RJ-3255WBL



PA-SS-001

Shoulder strap with adaptor

For models:

RJ-3035B | RJ-3055WB



PA-RS-002

Roll spacer

For models:

RJ-3035B | RJ-3055WB



PA-RH-002

Roll holder

For models:

RJ-3035B | RJ-3055WB



Media



Certified by
**Brother
International
Europe**

Our range of Brother international Europe certified paper, ribbons and labels offer technology that protects the printhead, reducing wear and tear and giving you greater performance.

Suitable for a range of Brother thermal printers and for use across various industries to meet your printing needs.

BDL-7J000058-040

Continuous
Receipt Roll

For models:

RJ-2031
RJ-2131
RJ-3235BL
RJ-3255WBL
RJ-4235BL
RJ-4255WBL

Roll Size:
58mm x 13.8m
Colour: white



BDL-7J000076-066

Continuous
Receipt Roll

For models:

RJ-3235BL
RJ-3255WBL

Label Size:
76mm x 42m
Colour: white



BDE-1J000079-040

Continuous
Receipt Roll

For models:

RJ-3035B
RJ-3055WB

Roll Size:
79mm x 14m
Colour: white



BDL-7J000102-058

Continuous
Receipt Roll

For models:

RJ-4235BL
RJ-4255WBL

Roll size:
101.6mm x 32.2m
Colour: white



BDE-1J026051-060

Die Cut
Labels Roll

For models:

RJ-2131

Label size:
51mm x 26mm
Colour: white
Quantity: 500



BDE-1J044076-040

Die Cut
Labels Roll

For models:

RJ-3055WB

Label size:
76mm x 44mm
Colour: white
Quantity: 70 per roll



BDE-1J044076-066

Die Cut
Labels Roll

For models:

RJ-3235BL
RJ-3255WBL

Label size:
76mm x 44mm
Colour: white
Quantity: 400 per roll



BDE-1J152102-058

Die Cut
Labels Roll

For models:

RJ-4235BL
RJ-4255WBL

Label size:
102mm x 152mm
Colour: white
Quantity: 85 per roll



Software support features


Brother provides all the necessary tools required for software developers to integrate printing into their mobile applications. Printer drivers are available for Windows OS, and Software Development Kits can be provided to support Android and iOS operating systems.

Template mode

Design the required document on your Windows PC, including logos and barcodes. Once transferred and stored in the printer's memory, the template can be recalled and any data replaced, before printing with just a few short commands.

AirPrint* and MFi* support

Easily connect to, and print from Apple devices thanks to AirPrint and MFi support.

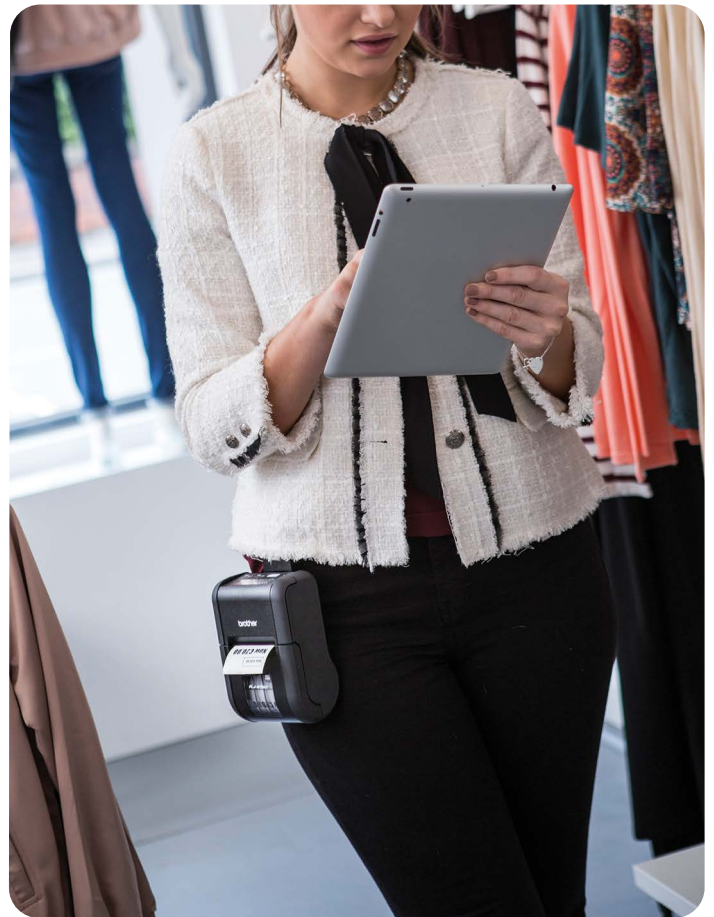

Software support features

Mobile Deploy*

Cloud-based app for mobile devices (iOS and Android™), which allows IT administrators to remotely update and configure multiple Brother mobile printers. Using Mobile Deploy, the administrator can easily upload new update packages to an online location, and then share the URLs with the users.

Printer Commands*

With support for ZPL II emulation, CPCL emulation in addition to ESC-POS commands, developers can easily integrate mobile printing into existing legacy systems.

<https://www.brother.eu/en/developer>



Helping keep
your workforce
agile printing
on site



RJ series range

2 inch - 3 inch

RJ-2031	RJ-2131	RJ-3035B	RJ-3055WB
2 Inch		3 Inch	

Printing / Media

Print technology	Direct thermal		Direct thermal	
Print resolution	203dpi	203dpi	203dpi	203dpi
Print speed	Max 4ips (101.6mm/sec)	Max 4ips (101.6mm/sec)	Max 4ips (101.6mm/sec)	Max 4ips (101.6mm/sec)
Maximum print width on receipt	54mm	54mm	72mm	72mm
Maximum print length	1000mm	1000mm	1000mm	1000mm
Media sensor type	Reflective	Transmissive / Reflective	Reflective	Transmissive / Reflective
Cutter type	Tear bar	Tear bar	Tear bar	Tear bar
Media types	Receipt, label**	Receipt, label, tag label	Receipt	Receipt, label, tag label
Receipt width	58mm max	58mm max	80mm max	80mm max
Receipt paper thickness - mils (mm)	2.3-3.5 (0.058-0.090)	2.3-3.5 (0.058-0.090)	2.3-3.5 (0.058-0.090)	2.3-3.5 (0.058-0.090)
Label width	-	55mm	-	76mm
Label thickness - mils (mm)	-	76mm	3.1-6.7 (0.080-0.170)	3.1-6.7 (0.080-0.170)
Roll diameter	40mm max	60mm max	40mm max	40mm max

LCD

Type	Backlit monochrome LCD	-
------	------------------------	---

Connectivity

USB	USB v2.0 full-speed (mini-B connector)		USB v2.0 full-speed (mini-B connector)	
Bluetooth	Yes	Yes	Yes	Yes
Bluetooth profiles	SPP (Serial Port Profile), GATT (Low Energy) / iAP supported	SPP (Serial Port Profile), GATT (Low Energy) / iAP supported	Classic: SPP (Serial Port profile), GATT(low energy) / iAP supported	Classic: SPP (Serial Port profile), GATT (low energy)
MFi support	Yes	Yes	Yes	No
Wireless LAN	-	-	-	Wireless LAN IEEE802.11a/b/g/n
Wireless LAN security (AdHoc mode)	-	-	-	None / WEP
Wireless LAN security (Infrastructure mode)	-	-	-	Authentic method (encryption scheme) Infrastructure mode: Open system (None/ WEP64/WEP128) WPA/WPA2-PSK (TKIP+AES) EAP-FAST (TKIP/AES) PEAPv0 (TKIP/AES) EAP-TLS (TKIP/AES) EAP-TTLS (TKIP/AES)
Wireless LAN security (Wireless direct mode)	-	-	-	None / WPA2-PSK (AES) / WEP
NFC	-	-	Yes	Yes

* Under Brother standard environment

** With black mark only

2 inch - 3 inch
continued

RJ-2031	RJ-2131	RJ-3035B	RJ-3055WB
2 Inch		3 Inch	

Software / Firmware

Operating system support

Operating system support	Windows® 10 Windows® 11 Windows® Server 2019, 2022, 2025 Linux	Windows® 10 Windows® 11 Windows® Server 2019, 2022, 2025 Linux	Windows® 10 Windows® 11 Windows® Server 2012, 2012 R2, 2016, 2019, 2022 Linux Mac OS 13, 14, 15, 16	Windows® 10 Windows® 11 Windows® Server 2012, 2012 R2, 2016, 2019, 2022 Linux Mac OS 13, 14, 15, 16
SDK availability (https://www.brother.eu/en/developer)	Android 9 or later iOS 13 or later	Android 9 or later iOS 13 or later	Android v5 - v10 iOS v9 - v13.2	Android v5 - v10 iOS v9 - v13.2
Supported printer commands	ZPL 2 emulation, CPCL emulation ESC/P, P-touch Template, Raster	ZPL 2 emulation, CPCL emulation ESC/P, P-touch Template, Raster	FBPL-EZC (EPL 2 / ZPL 2 / CPCL) FBPL-EZP (EPL 2 / ZPL 2 / ESC-POS) - download	FBPL-EZC (EPL 2 / ZPL 2 / CPCL) FBPL-EZP (EPL 2 / ZPL 2 / ESC-POS) - download
Barcode symbologies	CODE39 / ITF (I-2/5) / EAN-13 / EAN-8 / UPC-A / UPC-E / CODABAR / CODE128 / GS1-128 (UCC/EAN-128) / RSS symbols / CODE93 / POSTNET / UPC/EAN EXTENSION / MSI / QR Code (model 1, model 2, micro QR) / PDF417 (Standard, Truncate, MicroPDF417) / Data Matrix (ECC200 Square, ECC200 Rectangular) / MaxiCode / Aztec		Linear: Code128UCC, Code128 subsets A, B, C, EAN128, Interleaved 2 of 5, Interleaved 2 of 5 with check digit, Standard 2 of 5, Industrial 2 of 5, Code39, Code39 with check digit, Code93, EAN13, EAN8, UPCA, UPCE, EAN and UPC 2 (5) digits add-on, Codabar, Postnet, MSI, MSI with check digit, PLESSEY, China post, ITF14, EAN14, Code11, TELEPEN, TELEPEN number, PLANET, Code49, Deutsche Post Identcode, Deutsche Post, Leitcode, LOGMARS 2-dimensional: CODABLOCK F mode, GS1 DataBar, GS1 DataMatrix, Maxicode, AZTEC, PDF417, QR Code, Micro PDF417, TLC39	

Memory

RAM	32MB	32MB	32MB	32MB
Flash	32MB (12MB available for template upload)		16MB	16MB

Environmental

Drop protection	2.5m	2.5m	2.5m (with IP54 optional case)	2.5m (with IP54 optional case)
Sealing	IP54	IP54	IP54 (with optional case)	IP54 (with optional case)
Operating temperature	-10°C to +50°C / charging: 0°C to +40°C		-15°C to +50°C	-15°C to +50°C
Operating humidity	10%-90% / Maximum wet bulb: +27°C (no condensation)		10%-90% / Maximum wet bulb: +27°C (no condensation)	
Storage temperature	-20°C to +60°C for 120 hours max		-30°C to +70°C	-30°C to +70°C
Storage humidity	+45°C @ 95% for 120 hours max		10% to 90% non-condensing	10% to 90% non-condensing

Power

Battery	Rechargeable Li-ion		Rechargeable Li-ion	
AC adapter	100-240V AC (50/60Hz) to 15V DC (only for charging) (optional)		100-240V AC (50/60Hz) to 15V DC (only for charging)	
Car adapter (optional accessory)	12V DC (only for charging)		-	

Weights / Dimensions

Dimensions (mm)	99.3(w) 57(h) 128.8(d)	99.3(w) 73(h) 151.7(d)	105(w) x 49.5(h) x 116(d)	105(w) x 49.5(h) x 116(d)
Weight (including battery)	445g	535g	375g	375g

Included items

Supplied in box	Printer, Li-ion Battery, Belt clip, Documentation	Printer, Li-ion Battery, Belt clip, Documentation	Printer, AC adapter Li-ion battery Documentation Belt clip	Printer, AC adapter Li-ion battery Documentation Belt clip
-----------------	--	--	---	---

RJ series range

3 inch - 4 inch

RJ-3235BL	RJ-3255WBL	RJ-4235BL	RJ-4255WBL
3 Inch		4 Inch	

Printing / Media

Print technology	Direct thermal		Direct thermal	
Print resolution	203dpi	203dpi	203dpi	203dpi
Print speed	Max 5ips (127mm/sec)	Max 5ips (127mm/sec)	Max 5ips (127mm/sec)	Max 5ips (127mm/sec)
Maximum print width on receipt	72mm	72mm	104mm	104mm
Maximum print length	3000mm	3000mm	3000mm	3000mm
Media sensor type	Transmissive / Reflective	Transmissive / Reflective	Transmissive / Reflective	Transmissive / Reflective
Cutter type	Double tear bar	Double tear bar	Double tear bar	Double tear bar
Media types	Receipt / label / tag	Receipt / label / tag	Receipt, label, tag label	Receipt, label, tag label
Receipt width	80mm max	80mm max	113mm max	113mm max
Label width	76mm	76mm	113mm	113mm
Roll diameter	66mm max	66mm max	58mm max	58mm max

LCD

Type	Backlit monochrome LCD	Backlit monochrome LCD
------	------------------------	------------------------

Connectivity

USB	Yes (USB-C)	Yes (USB-C)	Yes (USB-C)	Yes (USB-C)
Bluetooth	Yes	Yes	Yes	Yes
Bluetooth profiles	SPP (Serial Port Profile) OPP (Object Push Profile) HCRP (Hard Copy Cable Replacement Profile) iAP supported Low Energy: GATT		Classic: SPP (Serial Port Profile) OPP (Object Push Profile) HCRP (Hard Copy Cable Replacement Profile) iAP supported Low Energy: GATT	
MFi support	Yes	Yes	Yes	Yes
Wireless LAN	-	IEEE802.11a/b/g/n/i/r Infrastructure mode: IEEE802.11a/b/g/n/i/r Wireless Direct mode: IEEE802.11g/n/d/i	-	Wireless LAN IEEE802.11 [a/b/g/n] (Infrastructure mode: [a/b/g/n] / Wireless direct mode: [g/n])
Wireless LAN security (AdHoc mode)	-	Authentic method (encryption scheme)	-	Authentic method (encryption scheme)
Wireless LAN security (Infrastructure mode)	-	SSL/TLS1.0/1.1/1.2 (HTTPS, IPPS) SNMPv3, 802.1x (EAP-FAST, PEAP, EAP-TLS, EAP-TTLS) WEP 64/128 bit, WPA-PSK (TKIP/AES), WPA2-PSK (AES), WPA3-SAE (AES)	-	Open system (None/WEP64/WEP128) Common key authentication (WEP) WPA/WPA2-PSK (TKIP+AES) EAP-FAST (TKIP/AES) PEAP (TKIP/AES) *3 EAP-TLS (TKIP/AES) EAP-TTLS (TKIP/AES)
Wireless LAN security (Wireless direct mode)	-	WPA2-PSK (AES)	-	WPA2-PSK (AES)
NFC	Yes (Passive only)	Yes (Passive only)	Yes (Passive only)	Yes (Passive only)

3 inch - 4 inch

continued

RJ-3235BL	RJ-3255WBL	RJ-4235BL	RJ-4255WBL
3 Inch		4 Inch	

Software / Firmware

Operating system support	Windows® 10 Windows® 11 Windows® Server 2016, 2019, 2022, 2025	Windows® 10 Windows® 11 Windows® Server 2016, 2019, 2022, 2025	Windows® 10 Windows® 11 Windows® Server 2016, 2019, 2022	Windows® 10 Windows® 11 Windows® Server 2016, 2019, 2022, 2025
SDK availability (https://www.brother.eu/en/developer)	Android 8 or later iOS 15 or later	Android 8 or later iOS 15 or later	Android 8 or later iOS 15 or later	Android 8 or later iOS 15 or later
Supported printer commands	Raster ESC/P P-touch Template ZPL 2 & CPCL emulation	Raster ESC/P P-touch Template ZPL 2 & CPCL emulation	Raster, ESC/P P-touch Template ZPL 2, CPCL, EPL 2 & DPL emulation	Raster, ESC/P P-touch Template ZPL 2, CPCL, EPL 2 & DPL emulation
Barcode symbologies	CODE39, CODE93, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, CODABAR (NW-7), CODE128, GS1-128 (UCC/EAN-128), GS1 DataBar (Standard, Truncated, Stacked, Stacked Omnidirectional), GS1 DataBar Limited, GS1 DataBar Expanded (Standard, Stacked), POSTNET, UPC/EAN EXTENSION, MSI, Intelligent Mail Barcode, QR Code, Micro QR Code, PDF417, MicroPDF417, MaxiCode, DataMatrix, Aztec		Linear: CODE 39, ITF(I-2/5), EAN-8, EAN-13, UPC-A, UPC-E, UPC/EAN EXTENSION CODABAR, CODE 128, GS1-128 (UCC/EAN 128), POSTNET, GS1 Databar (Omnidirectional / Truncated / Stacked / Stacked Omnidirectional / Limited / Expanded / Expanded Stacked) CODE93, MSI/Plessey Intelligent Mail Barcode 2-dimensional: QR Code (model 1, model 2, micro QR), Maxi code, PDF417 (Standard, Truncate) MicroPDF417, Data Matrix (Square, Rectangular) AztecCode	
Supported barcodes depend on printer commands. Please refer to the command reference for details.				

Memory

RAM	256MB	256MB	256MB	256MB
Flash	128MB	128MB	64MB	64MB

Environmental

Drop protection	2.0m	2.0m	2.1m	2.1m
Sealing	IP54	IP54	IP54	IP54
Operating temperature	Battery: -20°C to 55°C Charging: 0°C to 40°C		Battery: -20°C to 55°C AC adapter: -10°C to 40°C. Car adapter: -10°C to 50°C	
Operating humidity	10%-90% non condensing		10%-90% / Max wet bulb: +27°C (no condensation)	
Storage temperature	2.0m -20°C to +60°C for 120 hours max		-20°C to +60°C	
Storage humidity	10% - 95% non-condensing		10% - 95%, Max wet bulb: 45°C (No condensation)	

Power

Battery	Rechargeable Li-ion smart battery		Rechargeable Li-ion smart battery	
AC adapter	AC adapter (15V) only for charging (optional)		AC adapter (15V) only for charging (50/60Hz) (optional)	
Car adapter (optional accessory)	12V DC (only for charging)		12V DC (only for charging)	

Weights / Dimensions

Dimensions (mm)	117(w) x 77(h) x 180(d)	117(w) x 77(h) x 180(d)	153(w) x 68(h) x 159(d)	153(w) x 68(h) x 159(d)
Weight (including battery)	810g	810g	850g	850g

Included items

Supplied in box	Printer Li-ion battery Media discs Documentation Belt clip	Printer Li-ion battery Media discs Documentation Belt clip	Printer Li-ion battery Media discs Documentation Belt clip	Printer Li-ion battery Media discs Documentation Belt clip
-----------------	--	--	--	--

brother

at your side

Contact:

brother.dk
brother.ee
brother.fi
brother.is
brother.lt
brother.lv
brother.no
brother.se

All specifications correct at the time of printing and are subject to change. Brother is a registered trademark of Brother Industries Ltd.
Brand product names are registered trademarks or trademarks of their respective companies.